
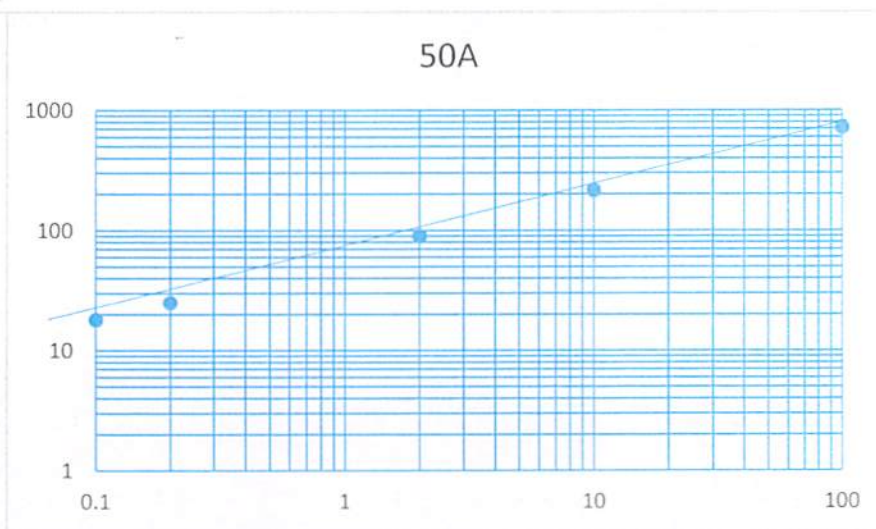
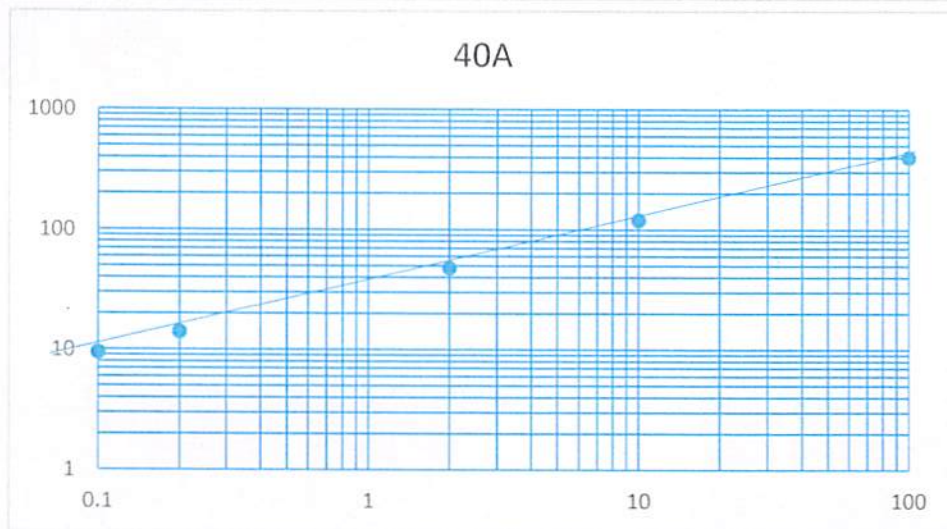
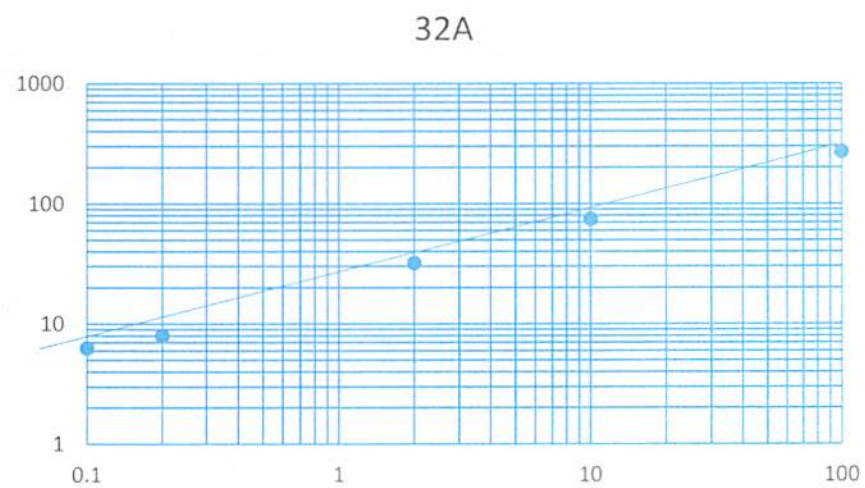


損失水頭の管継手類および弁類の相当管長(m)


呼び径(A) 種別	15 (1/2")	20 (3/4")	25 (1")	32 (1-1/4")	40 (1-1/2")	50 (2")	65 (1-1/2")	80 (3")	100 (4")	125 (5")	150 (6")	200 (8")	250 (10")
アングル弁 (フート弁)	2.4	3.6	4.5	5.4	6.6	8.4	10.2	12.0	16.5	21.0	24.0	33.0	43.0
逆止弁	1.2	1.6	2.0	2.5	3.1	4.0	4.6	5.7	7.6	10.0	12.0	15.0	19.0
玉形弁	4.5	6.0	7.5	10.5	13.5	16.5	19.5	24.0	37.5	42.0	49.5	70.0	90.0
仕切弁	0.12	0.15	0.18	0.24	0.3	0.39	0.48	0.63	0.81	0.99	1.2	1.4	1.7
90度エルボ	0.6	0.75	0.9	1.2	1.5	2.1	2.4	3.0	4.2	5.1	6.0	6.5	8.0
45度エルボ	0.36	0.45	0.54	0.72	0.9	1.2	1.5	1.8	2.4	3.0	3.6	3.7	4.2
90度ティ (分流)	0.9	1.2	1.5	1.8	2.1	3.0	3.6	4.5	6.3	7.5	9.0	14	20
90度ティ (直流)	0.18	0.24	0.27	0.36	0.45	0.6	0.75	.9	1.2	1.5	1.8	4.0	5.0

横軸: 損失水頭(m)
縦軸: 流量 (ℓ/min)


ガス管 (GISG3452) の摩擦損失水頭 (100mあたり)

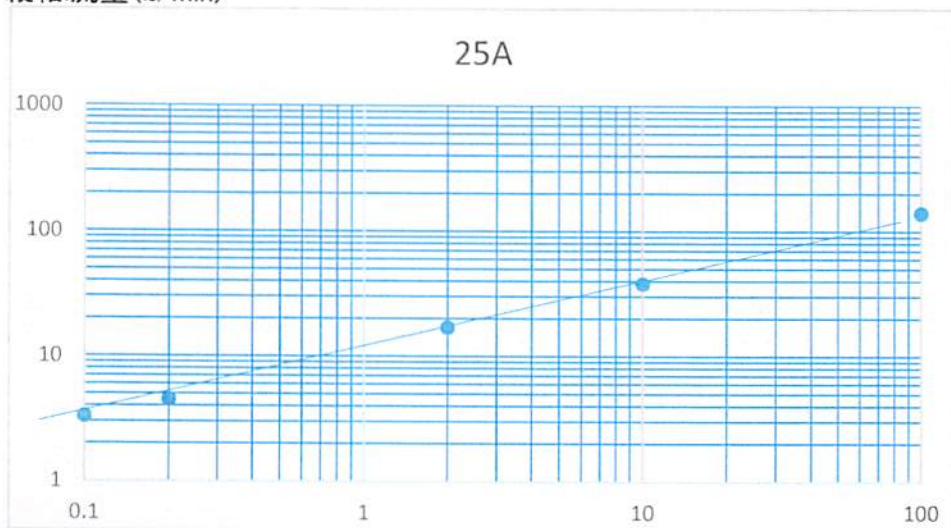


65A

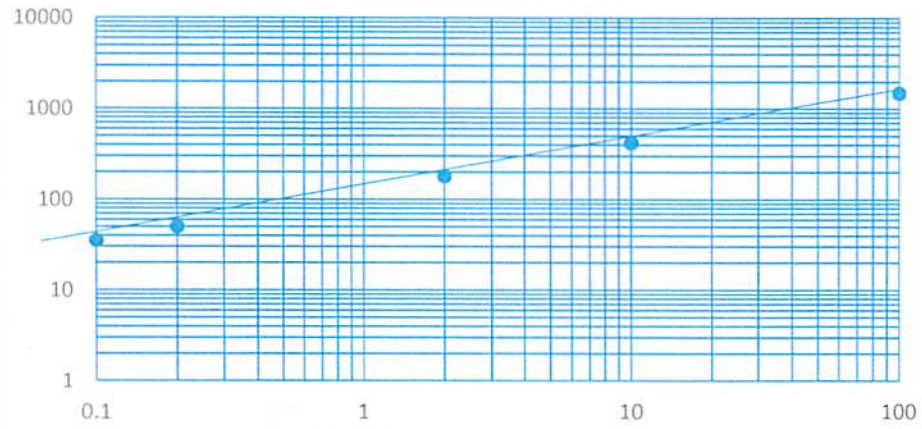


80A

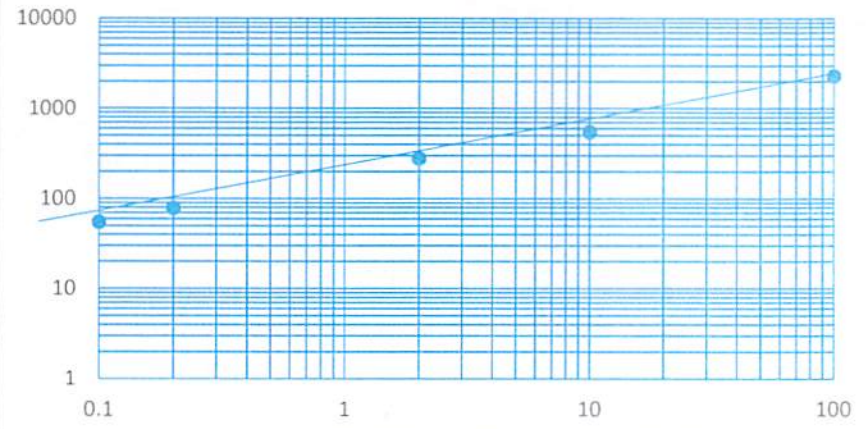


100A

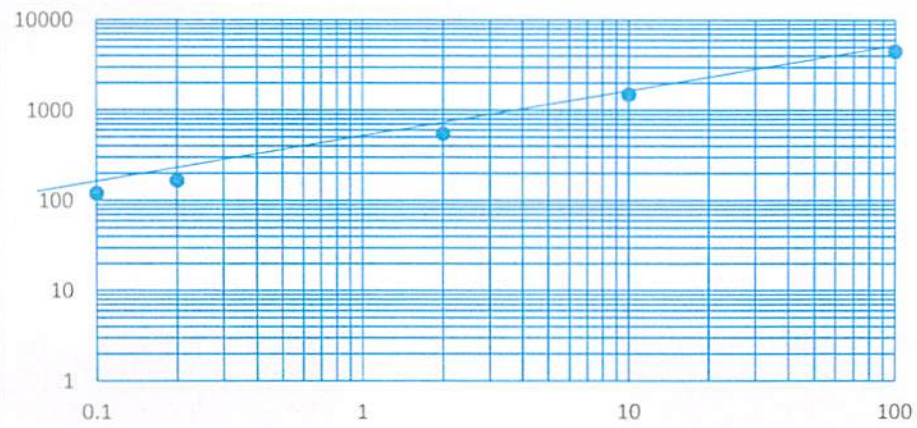


125A

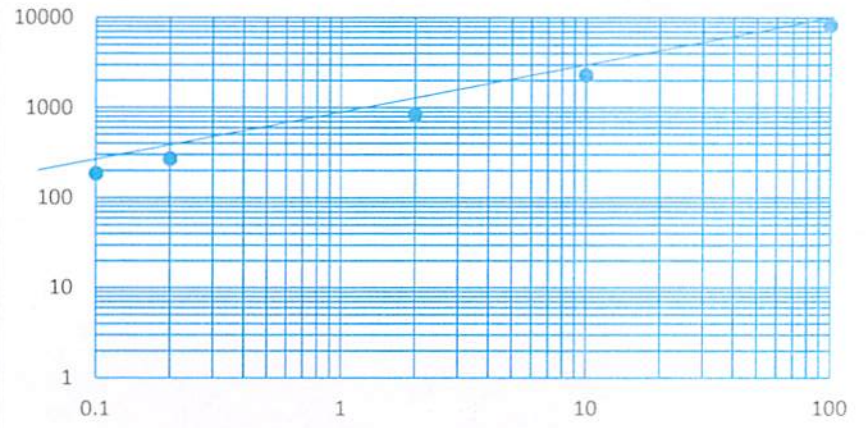

150A

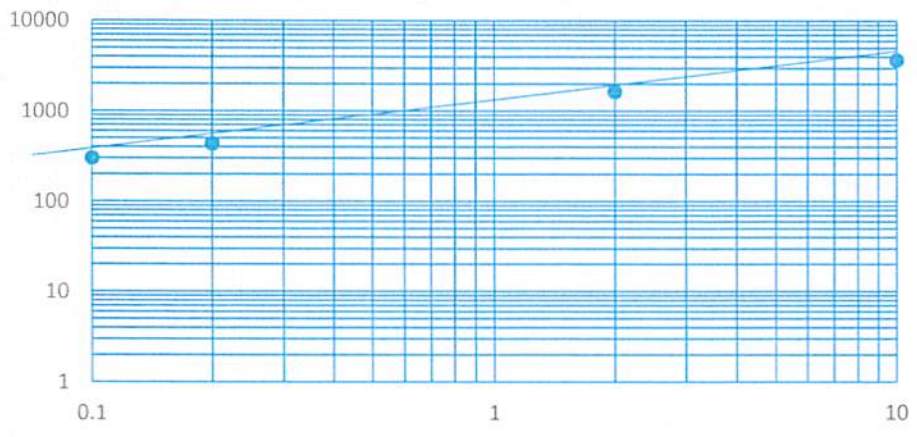

200A

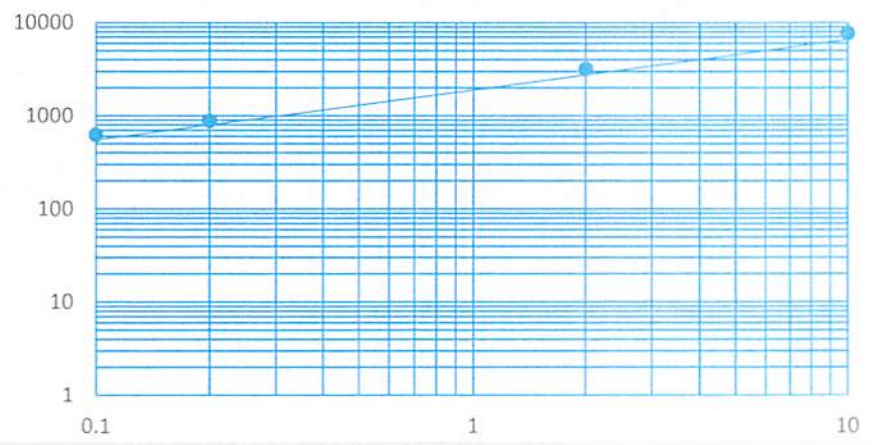

250A

